



SIMPLY EFFICIENT

VERSATILE, USABILITY, EFFICIENT & ROBUST
IF IT'S CRADLING, IT'S NAUTIPARK



QUICK PAD

5 mT

PARKUP EVO


5 / 6 / 10 mT

WUM

20 mT

WORKUP

10 / 20 mT

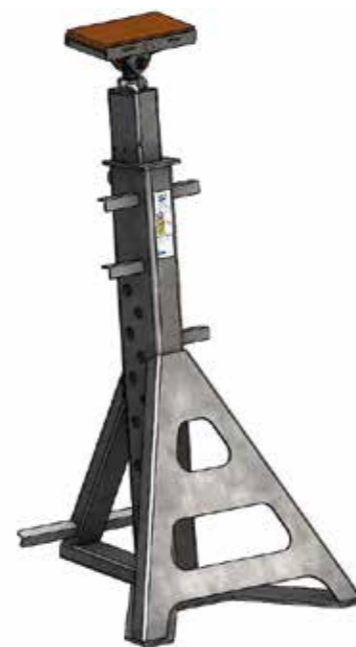

100 %  



+ 900 boats

in the database
of cradling solutions



+ 98 %

of the world's leisure boats can be cradled
with 2 models of NAUTIPARK cradles



+ 50 %

time saved
in cradling and handling




100%

safety & comfort
for people and boats



100%




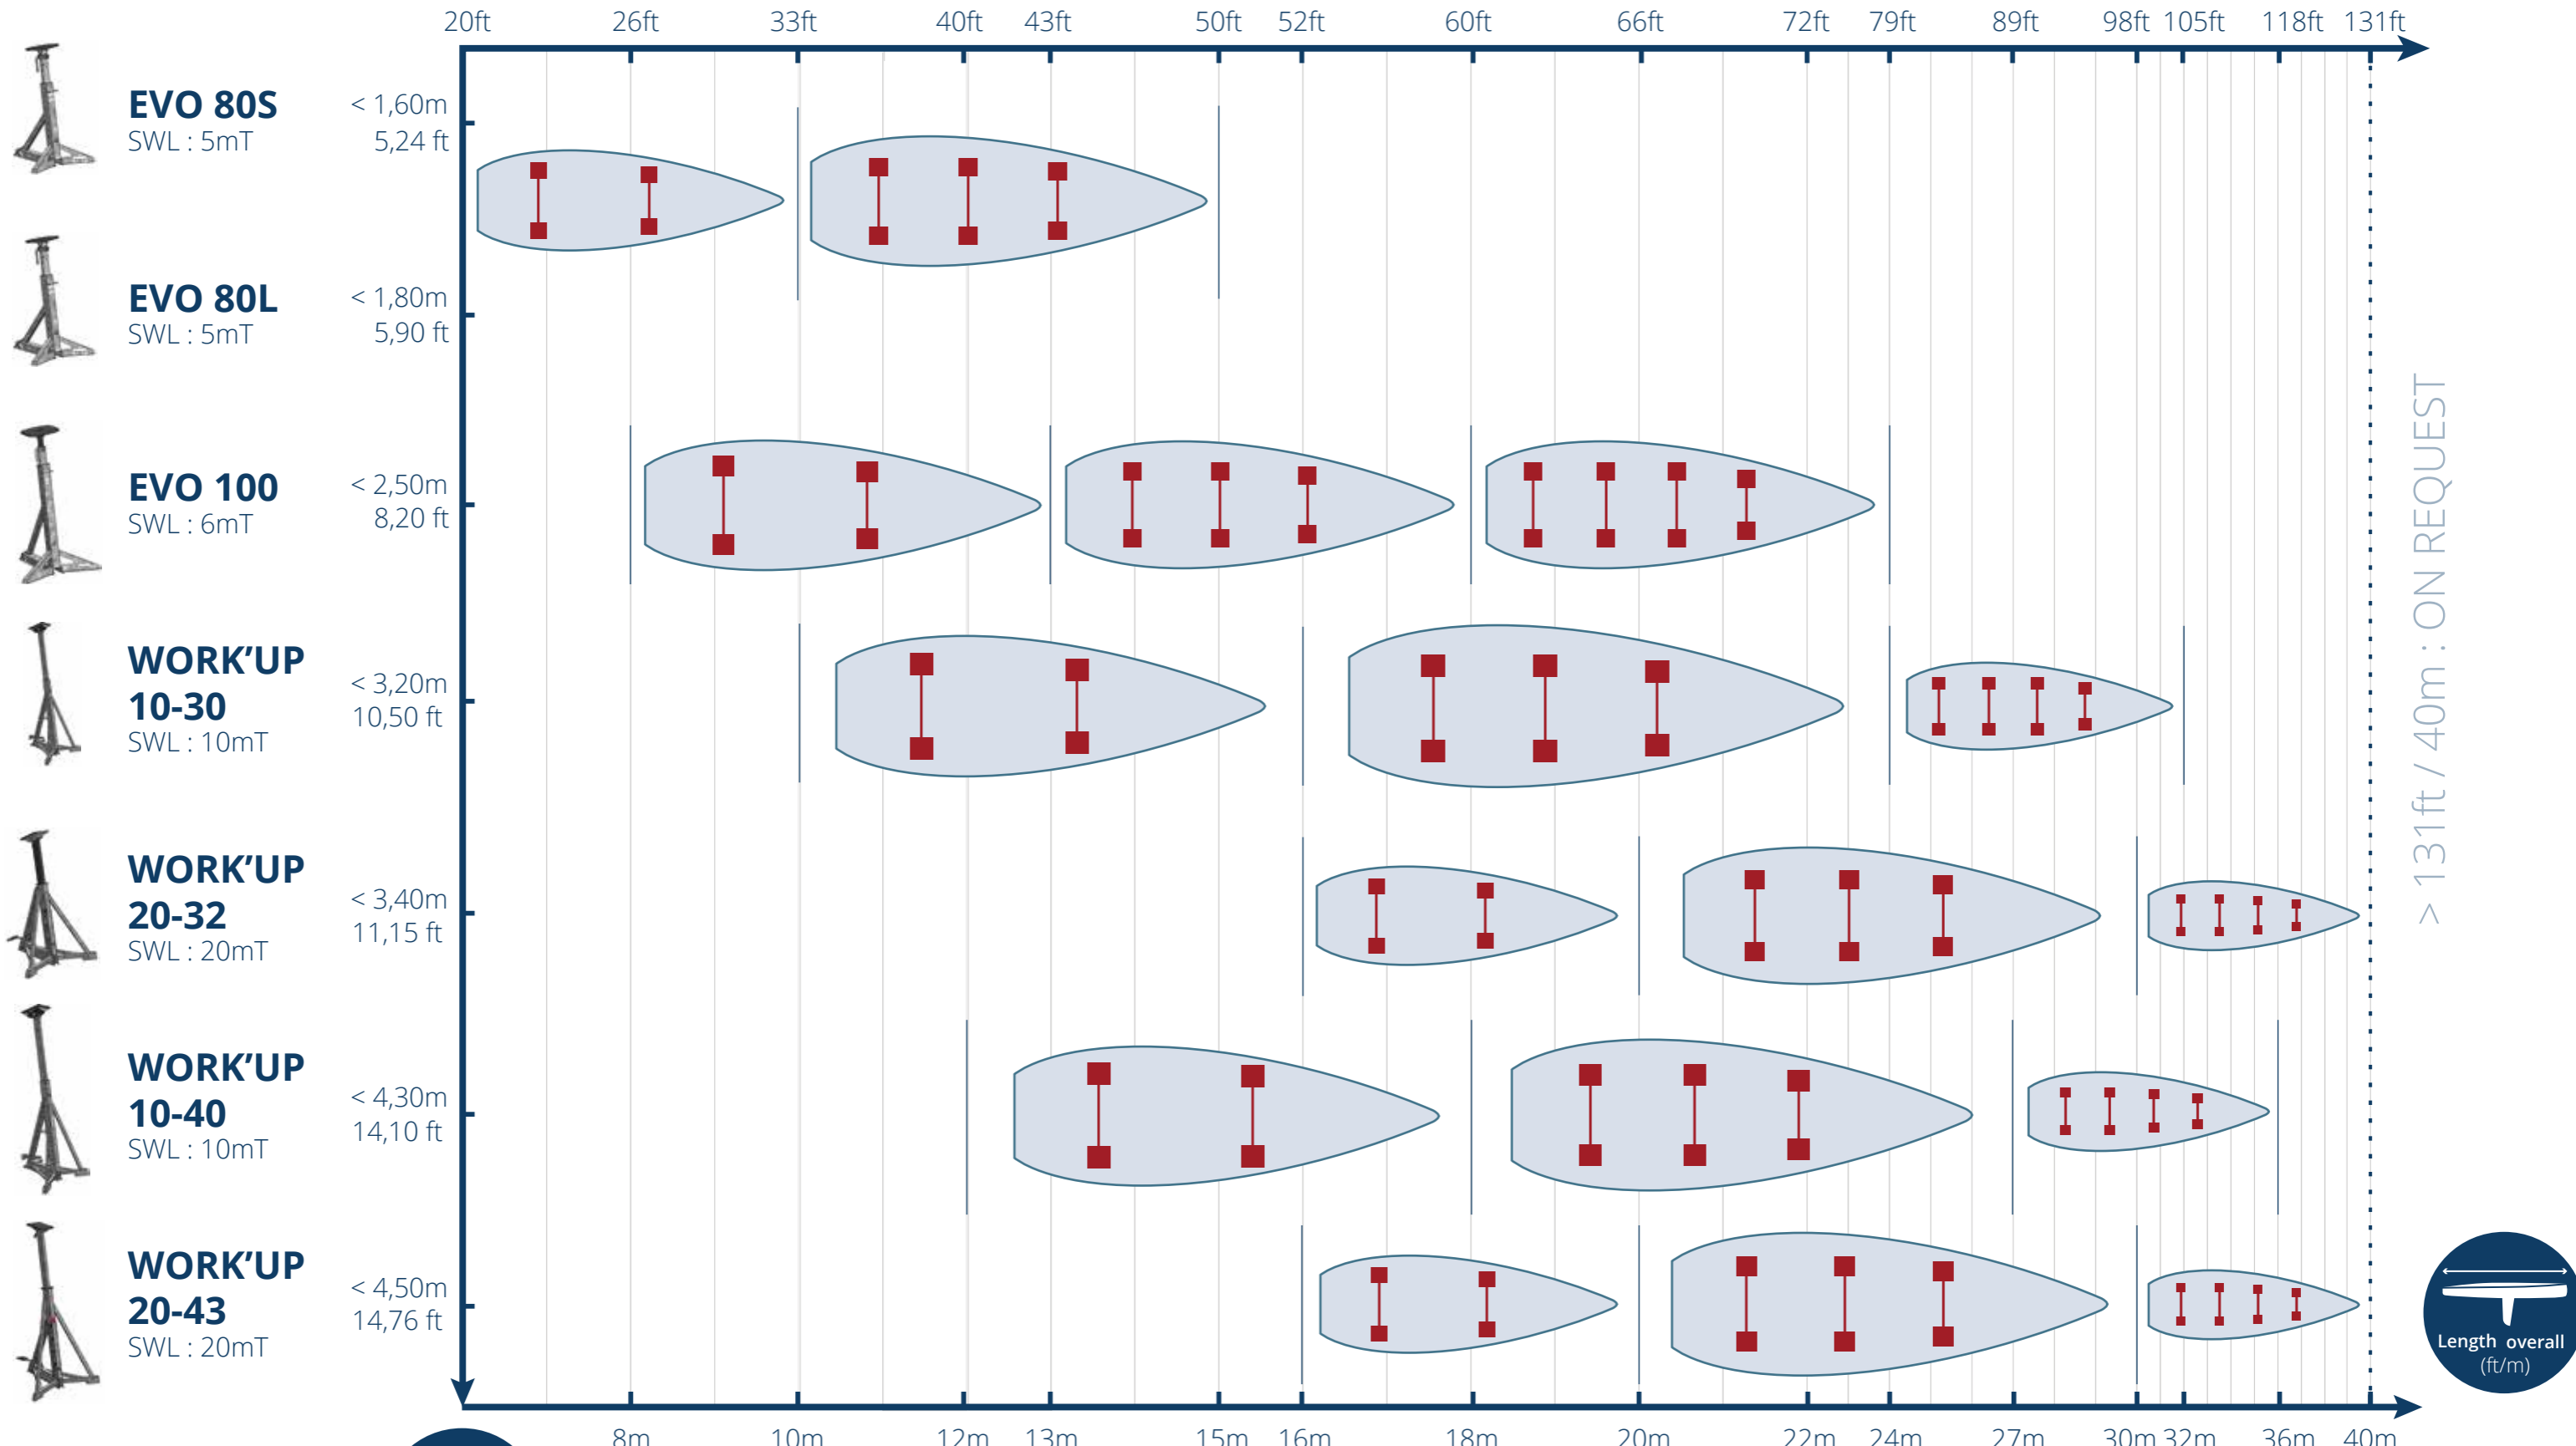



> 131ft / 40m : ON REQUEST



When a sailboat have any sail set (main sail, front sail, ...) add 50% stands more. On sailboat, crossbar between 2 opposite stands is mandatory. Respect the angle pads instructions (as far as possible stay in the green or yellow). While respecting the angle indication, as far as possible, the base of the boat stands must be in line with gunwale of the boat. Stands & keel supports must be placed under bulkheads. Minimum 80% of the weight of the boat must be on his keel. Add 50% boat stands more and assemble opposite boat stands (starboard - portside) together with crossbar in case of weather forecast greater than 95 mph - 150 km/h. This cradling recommendation is of an indicative nature: each cradle operator must perform the appropriate cradling, according to his features (height of the wooden blocks to place the keel, weather conditions, ground, material, careening or wintering...)



Length overall (ft/m)

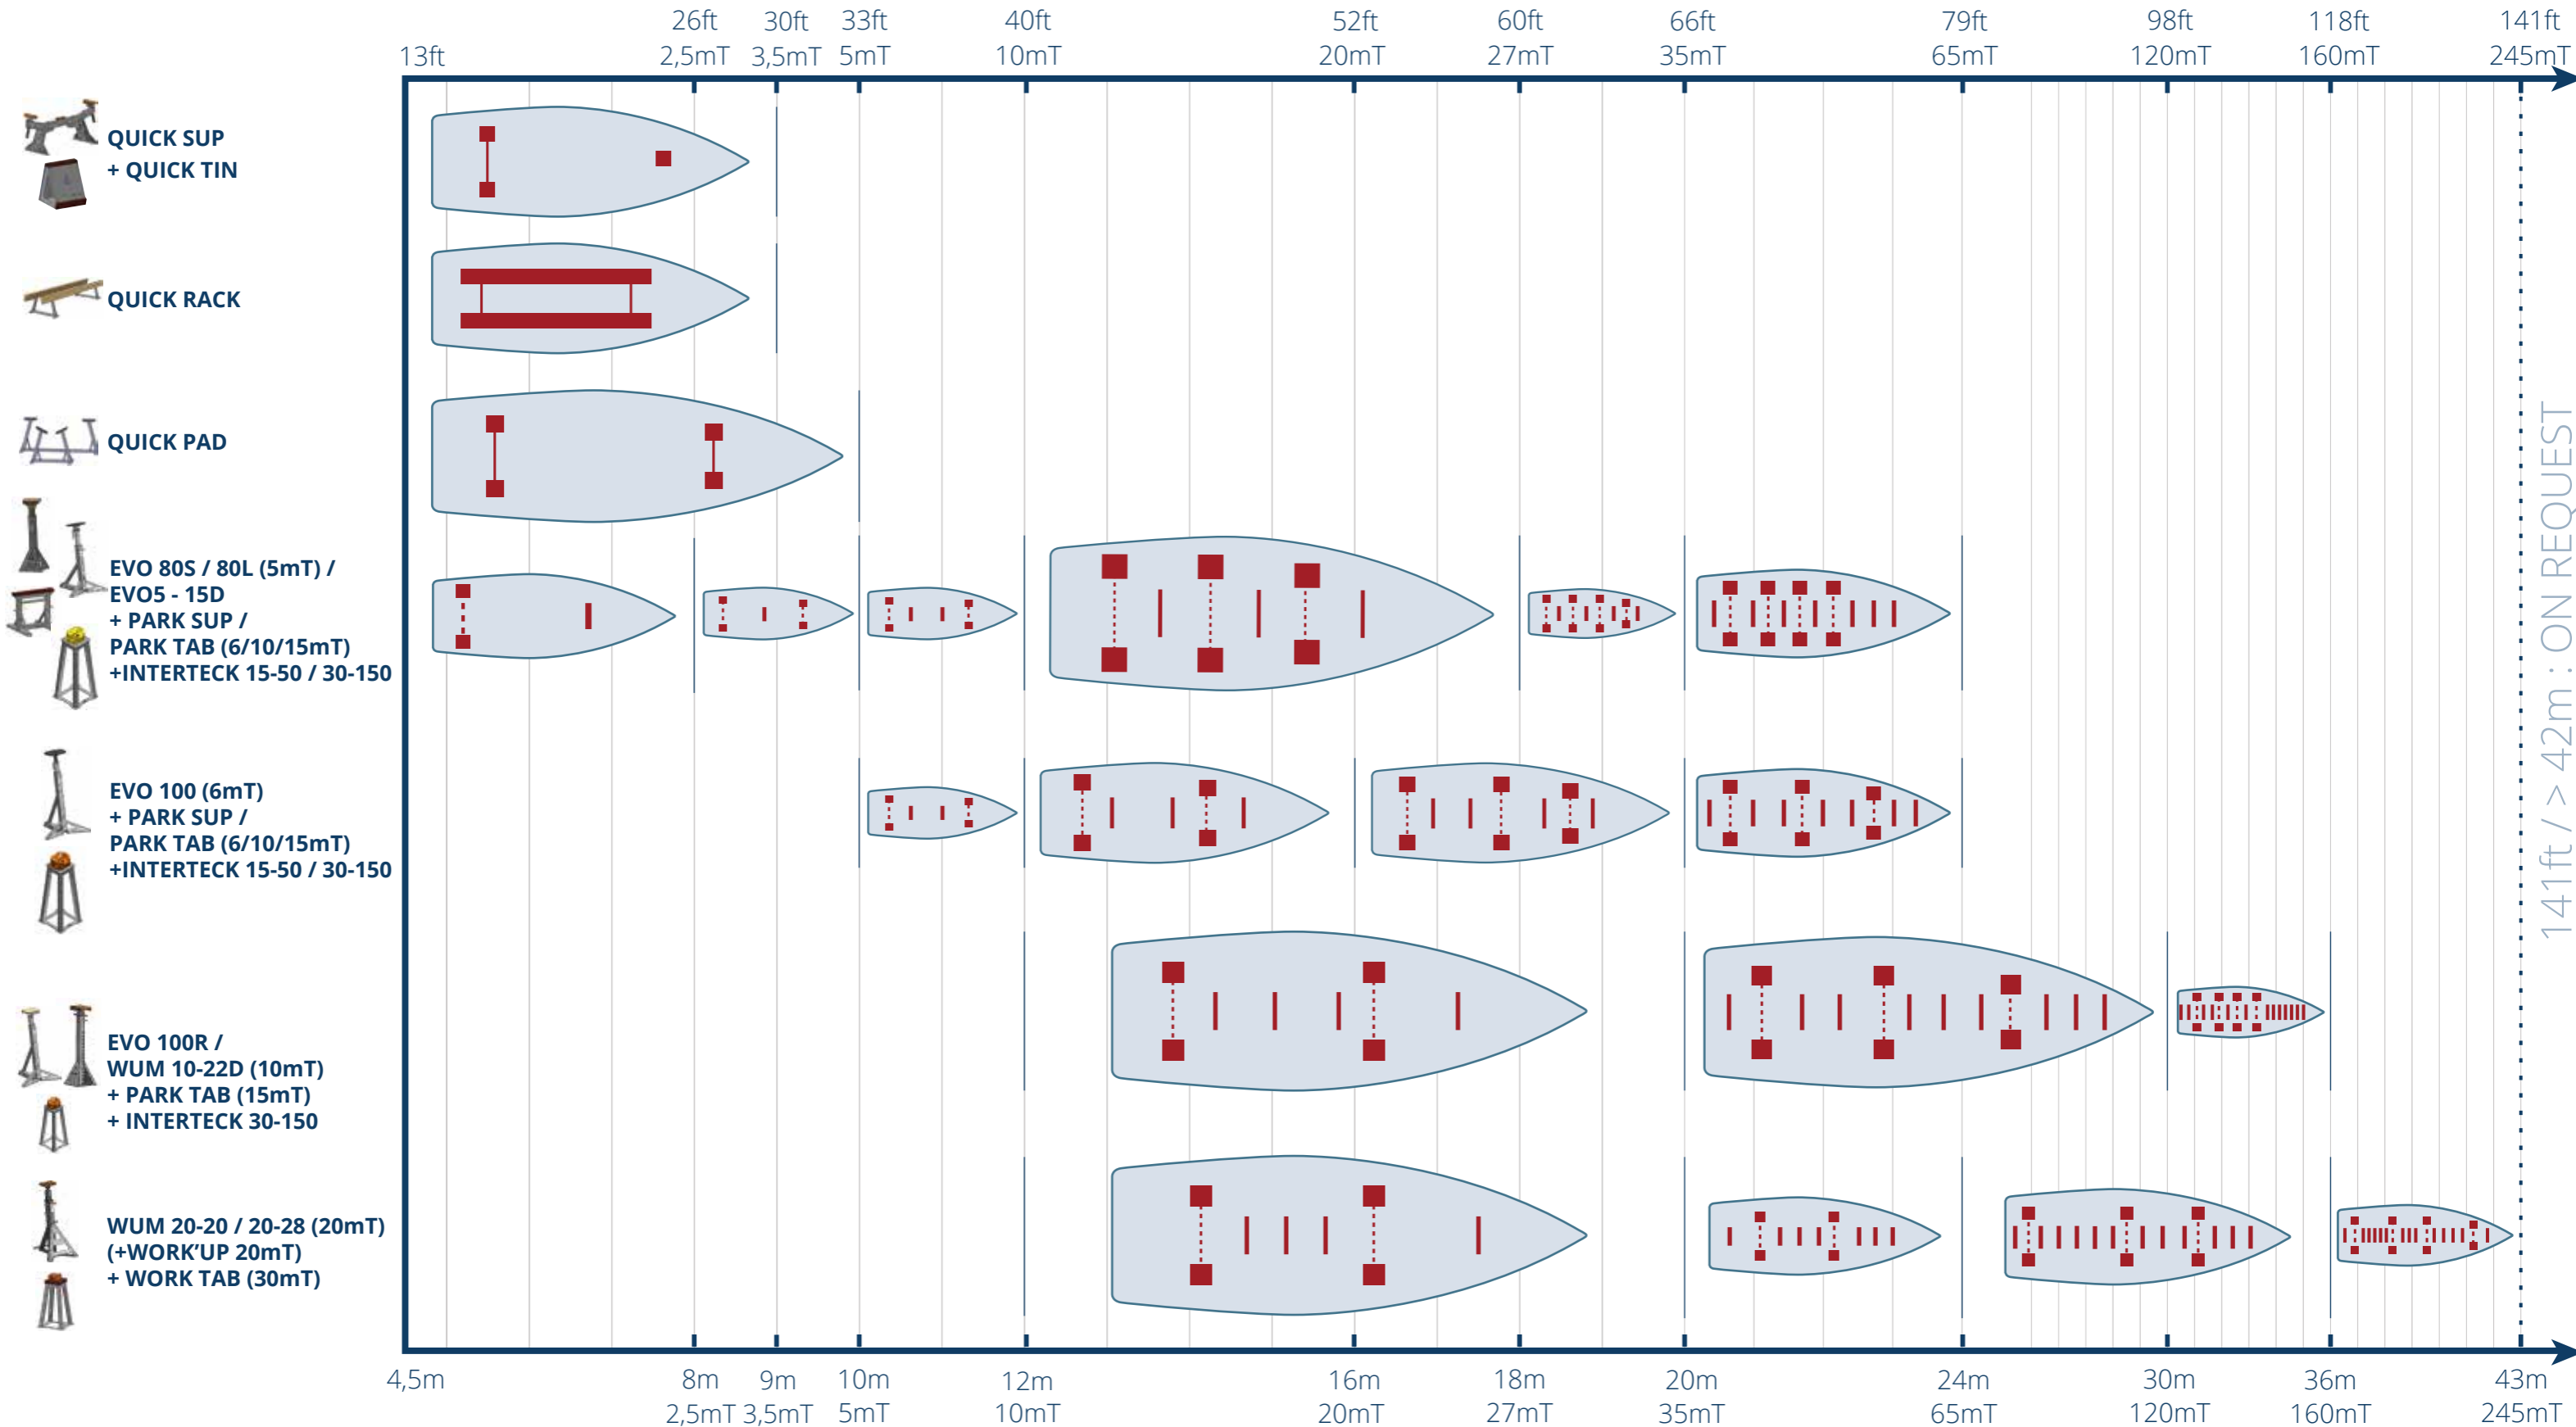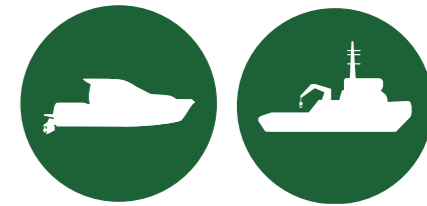

141ft / > 42m : ON REQUEST

⚠ The SWL of the block support must be able to take 110% of the weight of the boat. Keel blocking should be distributed to prevent high local loading: Use the number of keel supports and INTERTECK depending of the robustness of the keel of the boat, to avoid pressure on the hull. Minimum 80% of the weight of the boat must be on the keel (except for the Quickpad & Quickrack). The SWL of the boat stands must be able to take minimum 50% of the weight of the boat. Stands & keel supports must be placed under bulkheads. Respect the angle pads instructions. Add 50% boat stands more and assemble opposite boat stands (starboard - portside) together (chain, strap, crossbar) in case of weather forecast greater than 95 mph - 150 km/h. This cradling recommendation is of an indicative nature: each cradle operator must perform the appropriate cradling, according to his features (height of the wooden blocks to place the keel, weather conditions, ground, material, careening or wintering...)

