



SIMPLY EFFICIENT

VERSATILE, USABILITY, EFFICIENT & ROBUST
IF IT'S CRADLING, IT'S NAUTIPARK



QUICK PAD

5 T

PARKUP EVO

5 / 6 / 10 T

WUM

20 T

WORKUP

10 / 20 T



100 %  



+ 650 boats

in the database
of cradling solutions



+ 98 %

of the world's leisure boats can be cradled
with 2 models of NAUTIPARK cradles



+ 50 %

time saved
in cradling and handling





100%

safety & comfort
for people and boats



100%



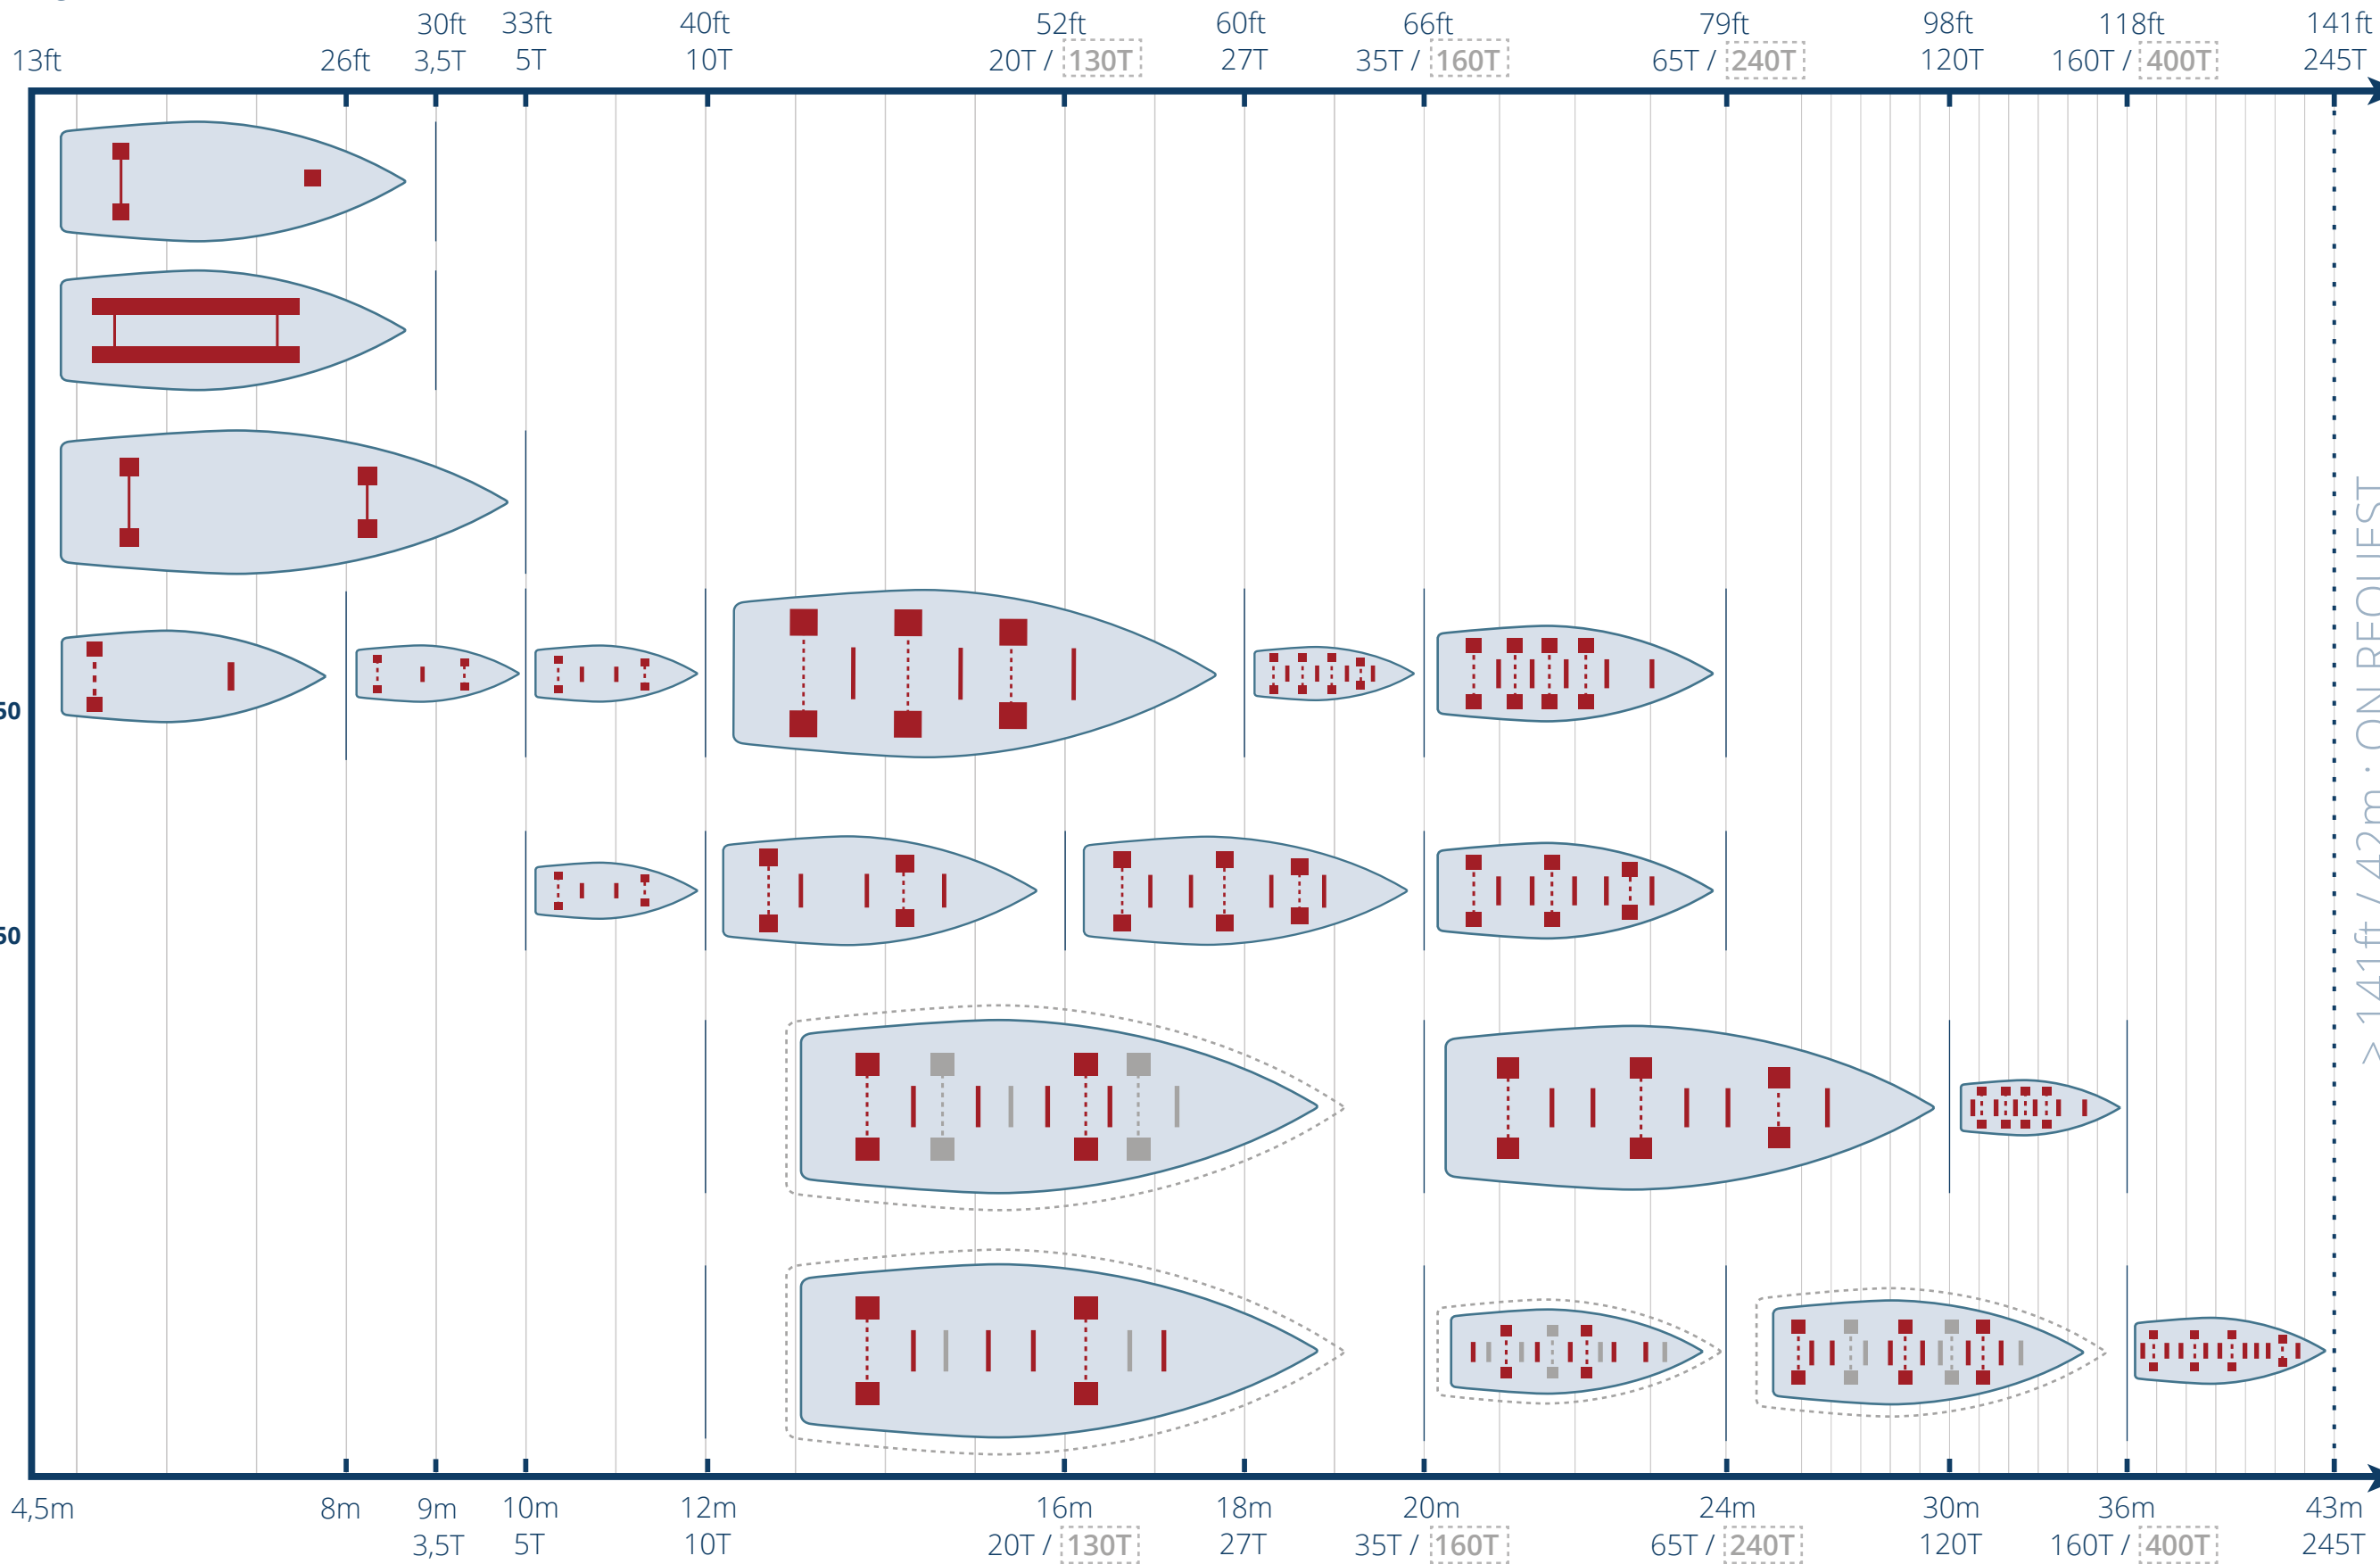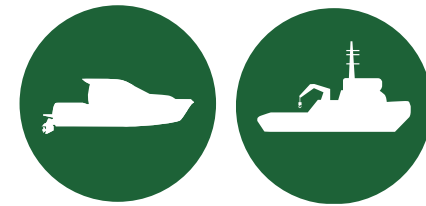


> 141ft / 42m : ON REQUEST

Added stands / supports for heaviest construction (steel)

The SWL of the block support must be able to take 110% of the weight of the boat. Keel blocking should be distributed to prevent high local loading : Use the number of keel supports and INTERTECK depending of the robustness of the keel of the boat, to avoid pressure on the hull. Minimum 80% of the weight of the boat must be on the keel (except for the Quickpad & Quickrack). The SWL of the boat stands must be able to take minimum 50% of the weight of the boat. Stands & keel supports must be placed under bulkheads. Respect the angle pads instructions. This cradling recommendation is of an indicative nature: each cradle operator must perform the appropriate cradling, according to his features (height of the wooden blocks to place the keel, weather conditions, ground, material, careening or wintering...)



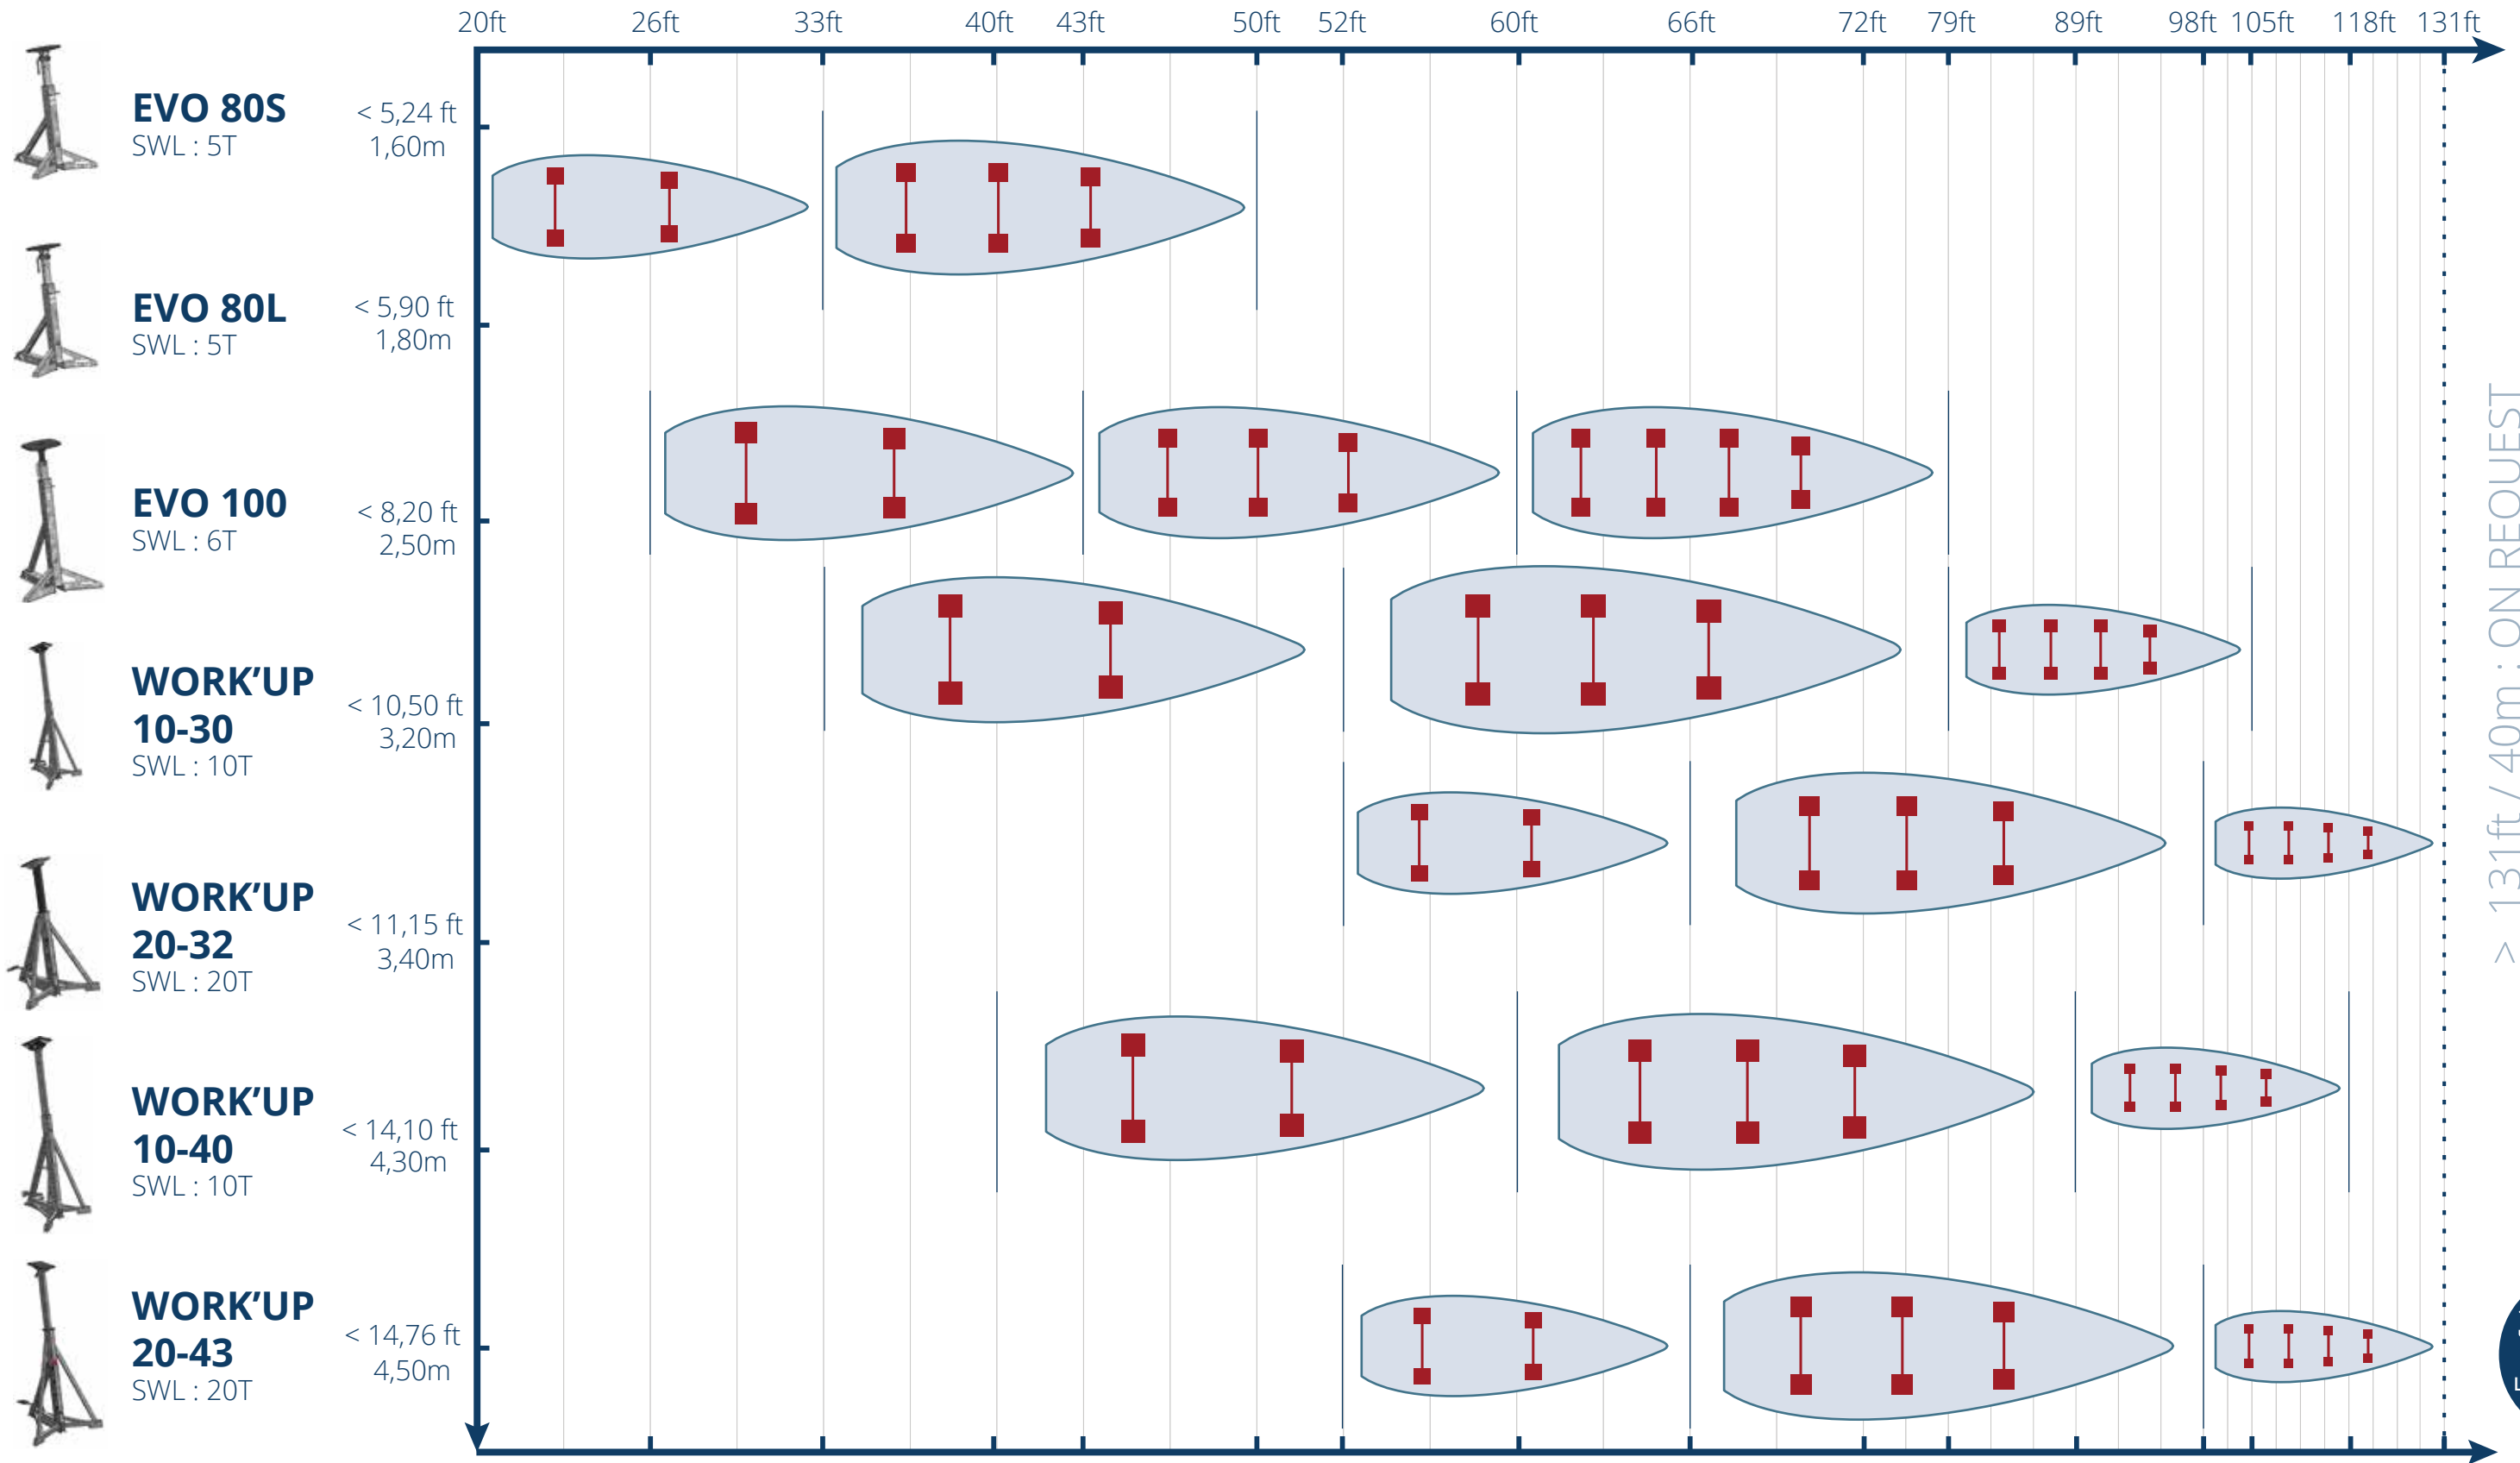

> 131ft / 40m : ON REQUEST



When a sailboat have any sail set (main sail, front sail, ...) add 2 stands more. On sailboat crossbar or sling between 2 opposite stands is mandatory. Respect the angle pads instructions. Stands & keel supports must be placed under bulkheads. Minimum 80% of the weight of the boat must be on his keel. The base of the boat stands must be in line with gunwale of the boat. This cradling recommendation is of an indicative nature: each cradle operator must perform the appropriate cradling, according to his features (height of the wooden blocks to place the keel, weather conditions, ground, material, careening or wintering...)

